Hanging Rail Kit, Tetrad Table

Product Numbers
- TFDHKT36xx

Required Tools
- Cordless Drill or Screwdriver
- 7/16" Open End Wrench or Adjustable Wrench
- Hammer
- Punch Tool

Hardware Pack: 23071501-xx-xx (TFHRHP)

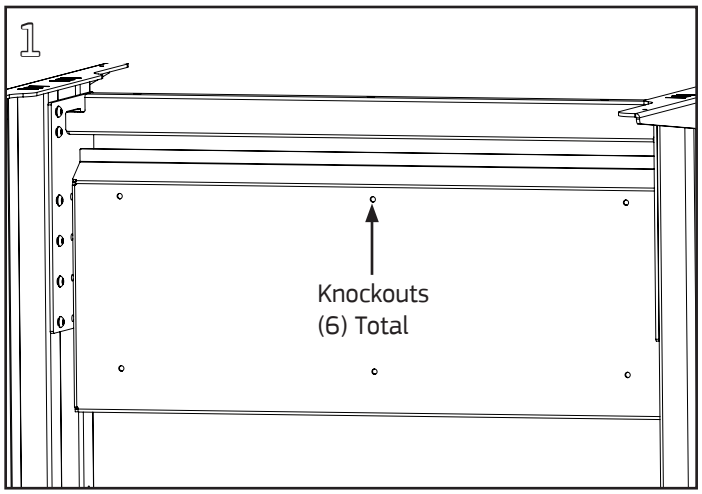

Using a hammer and punch tool, knockout all knockouts on the modesty panel.

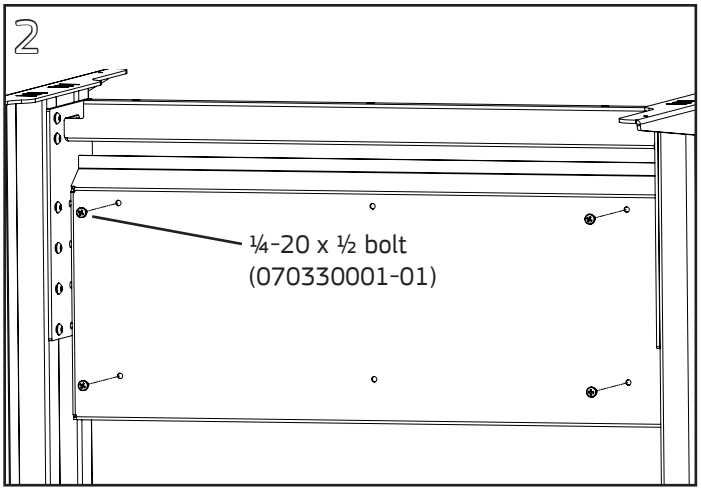

Insert the ¼-20 x ½" bolts from the back of the table into each knockout hole location except for the center hole of Modesty Panel. Secure each bolt with a ¼-20 nut. Allow .25" min. clearance between the back of the bold heads and the modesty panel.

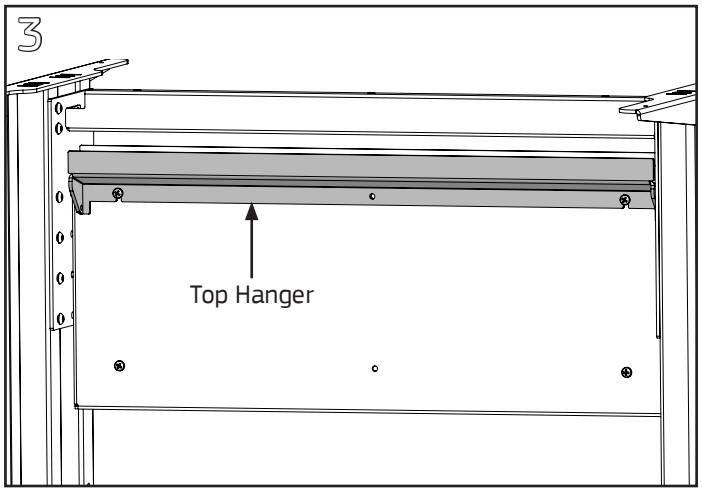

Slip the Top Hanger over the ¼-20 x ½" bolts using the slots to align the Hanger onto the Modesty Panel as shown.

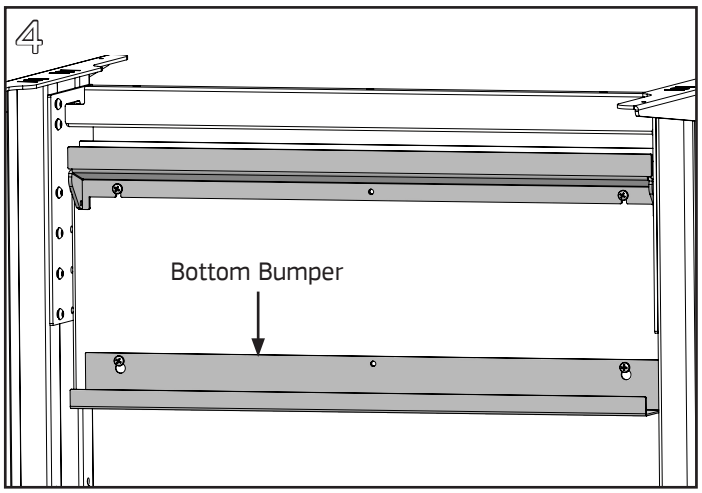

Slip the Bottom Bumper over the ¼-20 x ½" bolts using the keyed holes to align the Bumper onto the Modesty Panel as shown.

Hanging Rail Kit, Tetrad Table

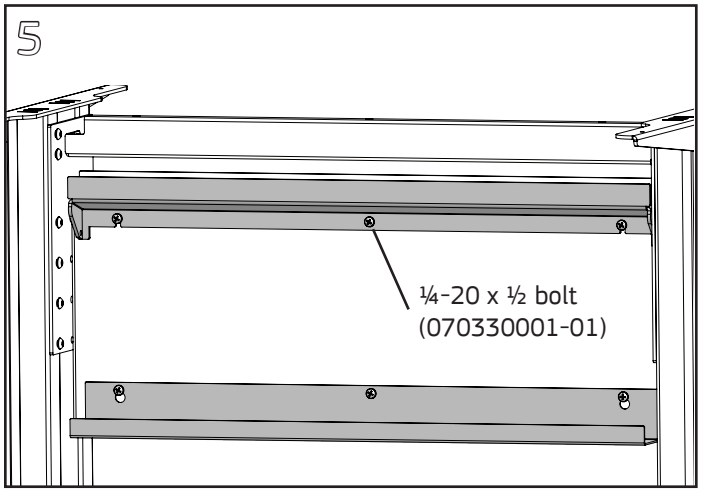

Insert the remaining ¼-20 x ½" bolts into the empty locations and fully secure all bolts.