

Magnetic White Board, Divided ErgoStat Riser Frame Mount


Product Numbers

- MBE1824
- MBE1830
- MBE1836


Required Tools

- ✂ #2 Phillips Screwdriver
- ✂ Tape Measure


Hardware Pack: MBEHP (08010110-02)

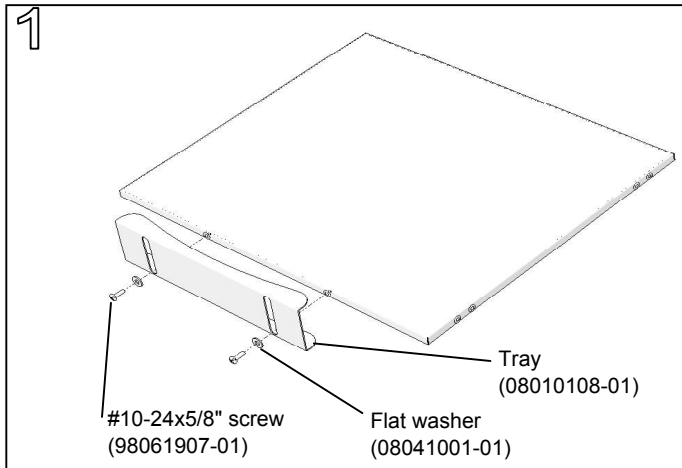


Attach tray to bottom threaded inserts with (2) flat washers and (2) #10-24x5/8" panhead screw using a **#2 Phillips screwdriver**. Adjust position forward or backward to desired location before fully tightening screws.

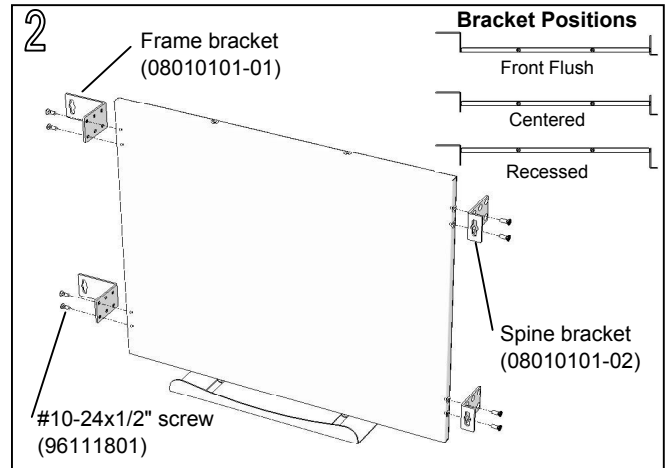

Attach brackets to side threaded inserts with (2) #10-24x1/2" flathead screws per bracket using a **#2 Phillips screwdriver**. Mount the shorter spine brackets on the Riser Spine side, and the longer frame brackets on the Riser Frame end. Left-hand Front Flush mounting on Riser Frame is shown.

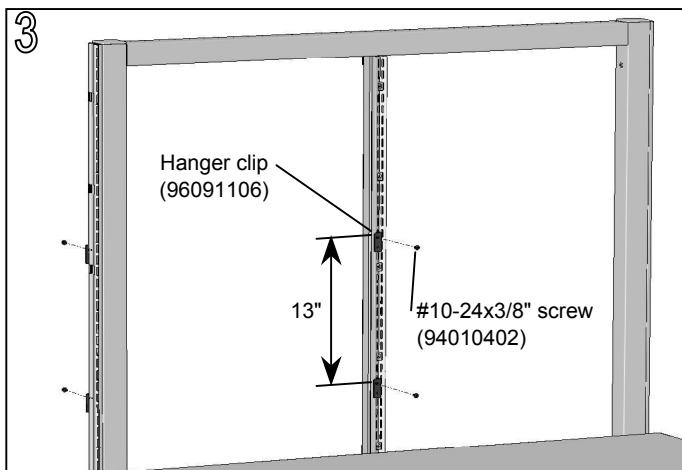

Insert (2) hanger clips 13" apart on the back of the Riser Frame hanger frame and the front of the Riser Spine at the same heights. Install one #10-24x3/8" panhead screw into the top hole of each hanger clip using a **#2 Phillips screwdriver**, leaving an 1/8" gap between head of screw and clip face.

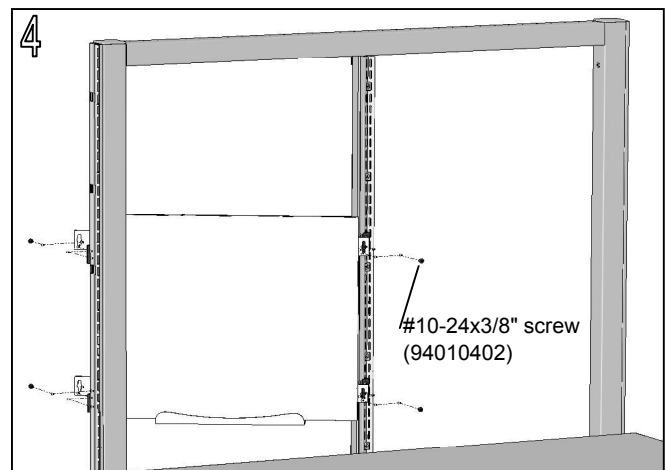

Rotate white board and insert in Riser Frame opening. Align screw heads in hanger clip with round center hole in each bracket and slide board down so top of keyslots rest on top screws. Install one #10-24x3/8" panhead screw into bottom hole on each hanger clip. Tighten all screws.